









The MatchBox Platform

+5 VDC Unified Power 	TEC Cooled 
PM SM MM Fiber Coupling 	Automatic Power Control 
OEM Dedicated Design 	USB or UART Control 
Self-Contained Unit 	Smart Electronics 



Applications


CW LASERS (REGULAR SPECTRUM)
 Fluorescence spectroscopy
 Scanning Microscopy
 Particle analysis
 Sorting
 Flow cytometry
 Excitation

PULSED LASERS
 Range Finding
 Laser Induced Breakdown Spectroscopy (LIBS)
 Laser Seeding
 Raman Spectroscopy
 Holography
 Supercontinuum Generation


CW LASERS (NARROW SPECTRUM)
 Raman Spectroscopy
 Holography
 Inspection
 Metrology
 Interferometry
 Laser Seeding
 Quantum cryptography

WAVELENGTH COMBINER
 Diagnostic
 Sorting
 Illumination
 Microscopy
 Flow cytometry

Control Software

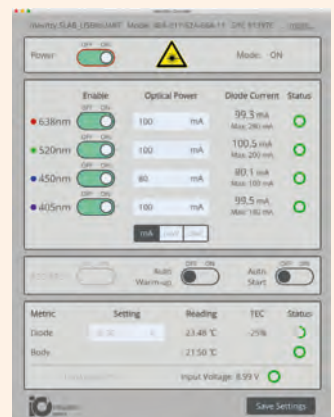


Part numbers of CW Lasers

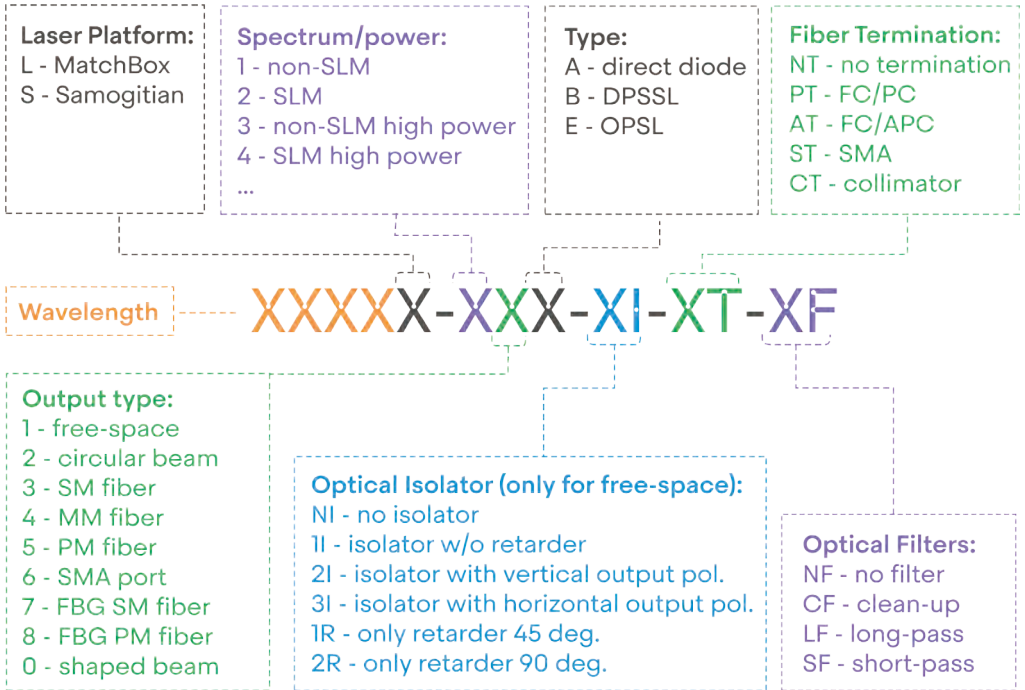


General Information

Each produced laser comes with a comprehensive test report



Beam profile of 1064L-11B (far field)

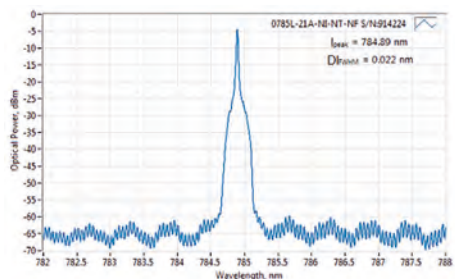

Spectrum of 0785L-21A SLM laser (linewidth measurement limited by spectrum analyzer)


Specifications of SLM CW Lasers

	Output power, mW	Power Stability, % RMS, 8 hrs*	Noise, % RMS, 20 Hz to 20 MHz*	Spectral Line-width FWHM, pm*	Polarization contrast*	M ² effective*	Transversal modes
0405L-21A	50	0,05	0,13	0,1	2000:1	1,3	TEM00
0405L-23A	20	0,1	0,14	0,1	N/A	1,05	TEM00
0405L-24A	40	0,03	0,18	0,1	N/A	N/A	Multimode
0405L-25A	20	0,1	0,2	0,1	20 dB	1,05	TEM00
0405L-26A	40	0,03	0,18	0,1	N/A	N/A	Multimode
0488L-21A	30	0,02	0,1	0,1	2000:1	1,50	TEM00
0488L-23A	10	0,2	0,2	0,1	N/A	1,05	TEM00
0488L-24A	15	0,2	0,2	0,1	N/A	N/A	Multimode
0488L-25A	10	0,2	0,2	0,1	23 dB	1,05	TEM00
0488L-26A	15	0,2	0,2	0,1	N/A	N/A	Multimode
0520L-21A	40	0,05	0,5	0,1	2000:1	1,40	TEM00
0520L-23A	25	0,05	0,5	0,1	N/A	1,05	TEM00
0520L-24A	35	0,05	0,5	0,1	N/A	N/A	Multimode
0520L-25A	25	0,05	0,5	0,1	27 dB	1,05	TEM00
0520L-26A	35	0,05	0,5	0,1	N/A	N/A	Multimode
0532L-21B	50	0,05	0,5	0,1	2000:1	1,05	TEM00
0532L-23B	25	0,1	0,6	0,1	N/A	1,05	TEM00
0532L-24B	40	0,1	0,7	0,1	N/A	N/A	Multimode
0532L-25B	25	0,08	0,5	0,1	25 dB	1,05	TEM00
0532L-26B	40	0,1	0,7	0,1	N/A	N/A	Multimode
0532L-41B	100	0,05	0,5	0,1	2000:1	1,05	TEM00
0532L-43B	50	0,07	0,5	0,1	N/A	1,05	TEM00
0532L-44B	80	0,05	0,5	0,1	N/A	N/A	Multimode
0532L-45B	50	0,10	0,5	0,1	23 dB	1,05	TEM00
0532L-46B	80	0,05	0,5	0,1	N/A	N/A	Multimode
0532L-61B	200	0,13	0,4	0,1	1000:1	1,05	TEM00
0532L-63B	100	0,06	0,4	0,1	N/A	1,05	TEM00
0532L-64B	150	1,00	0,5	0,1	N/A	N/A	Multimode
0532L-65B	100	0,10	0,5	0,1	23 dB	1,05	TEM00
0532L-66B	150	1,00	0,5	0,1	N/A	N/A	Multimode
0633L-21A	70	0,02	0,14	0,1	1500:1	1,3	TEM00
0633L-23A	35	0,04	0,1	0,1	N/A	1,05	TEM00
0633L-24A	40	0,05	0,2	0,1	N/A	N/A	Multimode
0633L-25A	35	0,05	0,15	0,1	25 dB	1,05	TEM00
0633L-26A	40	0,05	0,2	0,1	N/A	N/A	Multimode
0638L-21A	100	0,02	0,12	0,1	2000:1	1,3	TEM00
0638L-23A	60	0,05	0,25	0,1	N/A	1,05	TEM00
0638L-24A	80	0,1	0,25	0,1	N/A	N/A	Multimode
0638L-25A	60	0,04	0,1	0,1	27 dB	1,05	TEM00
0638L-26A	80	0,10	0,25	0,1	N/A	N/A	Multimode
0783L-21A	110	0,03	0,15	0,1	2000:1	1,2	TEM00
0783L-23A	70	0,03	0,15	0,1	N/A	1,05	TEM00
0783L-24A	80	0,03	0,15	0,1	N/A	N/A	Multimode
0783L-25A	70	0,05	0,15	0,1	27 dB	1,05	TEM00
0783L-26A	80	0,03	0,15	0,1	N/A	N/A	Multimode
0785L-21A	130	0,02	0,10	0,1	2000:1	1,2	TEM00
0785L-23A	80	0,03	0,15	0,1	N/A	1,05	TEM00
0785L-24A	100	0,05	0,15	0,1	N/A	N/A	Multimode
0785L-25A	80	0,03	0,15	0,1	27 dB	1,05	TEM00
0785L-26A	100	0,05	0,15	0,1	N/A	N/A	Multimode
0785L-27A	80	0,20	0,25	5,0	N/A	1,05	TEM00
0785L-28A	80	0,20	0,25	5,0	23 dB	1,05	TEM00
0785L-41A	1000	0,07	0,8	50	1500:1	N/A	Multimode
0785L-44A	800	0,04	0,4	50	N/A	N/A	Multimode

	Output power, mW	Power Stability, % RMS, 8 hrs*	Noise, % RMS, 20 Hz to 20 MHz*	Spectral Line- width FWHM, pm*	Polarization contrast*	M ² effective*	Transversal modes
0785L-t46A	800	0,05	0,4	50	N/A	N/A	Multimode
0830L-21A	100	0,02	0,20	0,1	2000:1	1,3	TEM00
0830L-23A	70	0,05	0,25	0,1	N/A	1,05	TEM00
0830L-24A	80	0,05	0,25	0,1	N/A	N/A	Multimode
0830L-25A	70	0,05	0,25	0,1	27 dB	1,05	TEM00
0830L-26A	80	0,05	0,25	0,1	N/A	N/A	Multimode
1030L-21B	400	0,1	1,5	0,2	1000:1	1,05	TEM00
1030L-23B	200	0,1	1,5	0,2	N/A	1,05	TEM00
1030L-24B	300	0,1	1,5	0,2	N/A	N/A	Multimode
1030L-25B	200	0,2	1	0,2	23 dB	1,05	TEM00
1030L-26B	280	1	0,5	0,2	N/A	N/A	Multimode
1064L-21B	400	0,1	0,3	0,2	1500:1	1,1	TEM00
1064L-23B	200	0,1	1	0,2	N/A	1,05	TEM00
1064L-24B	300	0,1	1	0,2	N/A	N/A	Multimode
1064L-25B	200	0,2	0,9	0,2	23 dB	1,05	TEM00
1064L-26B	280	1	0,5	0,2	N/A	N/A	Multimode

* Typical performance (full specification available at <https://integratedoptics.com/products/cw-lasers>)

Note: Product specifications are subject to change without prior notice to improve reliability, function or design or otherwise.

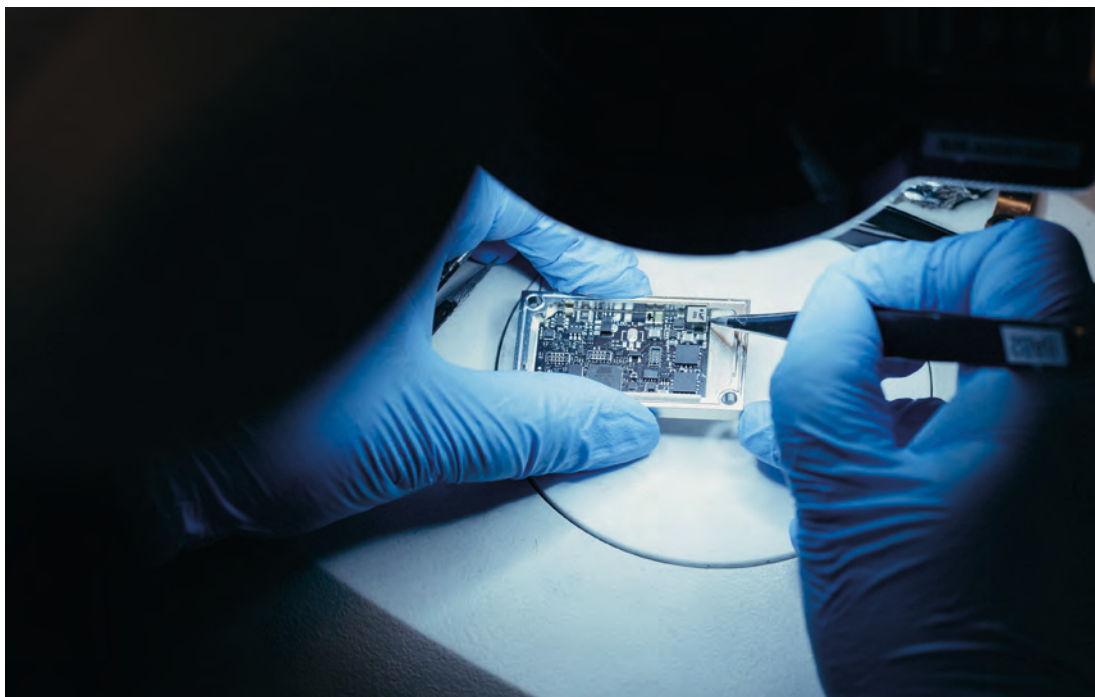

Regular Spectrum CW Lasers

	Output power, mW	Power Stability, % RMS, 8 hrs*	Noise, % RMS, 20 Hz to 20 MHz*	Spectral Line- width FWHM, nm*	Polarization contrast / extinction*	M ² effective*	Transversal modes
0405L-11A	180	0,1	0,10	0,5	2000:1	1,3	TEM00
0405L-13A	100	0,04	0,20	0,5	N/A	1,05	TEM00
0405L-14A	150	0,05	0,2	0,5	N/A	N/A	Multimode
0405L-15A	100	0,04	0,2	0,5	30 dB	1,05	TEM00
0405L-16A	150	0,05	0,2	0,5	N/A	N/A	Multimode
0450L-11A	60	0,05	0,40	0,8	2000:1	1,4	TEM00
0450L-13A	35	0,05	0,25	0,8	N/A	1,05	TEM00
0450L-14A	50	0,05	0,25	0,8	N/A	N/A	Multimode
0450L-15A	35	0,05	0,25	0,8	23 dB	1,05	TEM00
0450L-16A	50	0,1	0,25	0,8	N/A	N/A	Multimode
0488L-11A	40	0,02	0,3	0,5	1500:1	1,2	TEM00
0488L-13A	20	0,05	0,5	0,5	N/A	1,05	TEM00
0488L-14A	30	0,1	0,5	0,5	N/A	N/A	Multimode
0488L-15A	20	0,05	0,5	0,5	27 dB	1,05	TEM00
0488L-16A	30	0,05	0,5	0,5	N/A	N/A	Multimode
0505L-11A	60	0,02	0,5	0,7	2000:1	1,25	TEM00
0505L-13A	30	0,05	0,5	0,7	N/A	1,05	TEM00
0505L-14A	50	0,05	0,5	0,7	N/A	N/A	Multimode
0505L-15A	30	0,05	0,5	0,7	23 dB	1,05	TEM00
0505L-16A	50	0,05	0,5	0,7	N/A	N/A	Multimode
0520L-11A	80	0,02	0,50	1	3000:1	1,4	TEM00
0520L-13A	40	0,02	0,3	1	N/A	1,05	TEM00
0520L-14A	70	0,03	0,5	1	N/A	N/A	Multimode
0520L-15A	40	0,02	0,4	1	29 dB	1,05	TEM00
0520L-16A	70	0,02	0,4	1	N/A	N/A	Multimode
0532L-11B	200	0,06	2,5	0,1	1000:1	1,2	TEM00
0532L-13B	100	0,5	5	0,1	N/A	1,05	TEM00
0532L-14B	160	0,04	5	0,1	N/A	N/A	Multimode
0532L-15B	100	0,5	5	0,1	23 dB	1,05	TEM00
0532L-16B	150	0,5	5	0,1	N/A	N/A	Multimode
0633L-11A	90	0,05	0,25	0,5	2000:1	1,2	TEM00
0633L-13A	60	0,05	0,25	0,5	N/A	1,05	TEM00
0633L-14A	80	0,05	0,25	0,5	N/A	N/A	Multimode
0633L-15A	60	0,05	0,25	0,5	27 dB	1,05	TEM00
0633L-16A	80	0,05	0,25	0,5	N/A	N/A	Multimode
0638L-11A	170	0,05	0,13	0,7	2000:1	1,15	TEM00
0638L-13A	100	0,03	0,20	0,7	N/A	1,05	TEM00
0638L-14A	150	0,05	0,25	0,7	N/A	N/A	Multimode
0638L-15A	100	0,03	0,15	0,7	31 dB	1,05	TEM00
0638L-16A	150	0,05	0,25	0,7	N/A	N/A	Multimode
0660L-11A	110	0,05	0,2	0,7	3000:1	1,25	TEM00
0660L-13A	70	0,05	0,25	0,7	N/A	1,05	TEM00
0660L-14A	90	0,1	0,25	0,7	N/A	N/A	Multimode
0660L-15A	70	0,1	0,25	0,7	27 dB	1,05	TEM00
0660L-16A	90	0,1	0,25	0,7	N/A	N/A	Multimode
0785L-11A	170	0,03	0,1	0,1	2000:1	1,2	TEM00
0785L-13A	120	0,02	0,25	0,5	N/A	1,05	TEM00
0785L-14A	150	0,02	0,35	0,2	N/A	N/A	Multimode
0785L-15A	120	0,05	0,25	0,5	27 dB	1,05	TEM00
0785L-16A	150	0,05	0,25	0,2	N/A	N/A	Multimode
0830L-11A	130	0,05	0,10	0,5	2000:1	1,4	TEM00
0830L-13A	70	0,05	0,25	0,5	N/A	1,05	TEM00
0830L-14A	90	0,05	0,25	0,5	N/A	N/A	Multimode
0830L-15A	70	0,05	0,25	0,5	27 dB	1,05	TEM00

	Output power, mW	Power Stability, % RMS, 8 hrs*	Noise, % RMS, 20 Hz to 20 MHz*	Spectral Line- width FWHM, nm*	Polarization contrast*	M ² effective*	Transversal modes
0830L-16A	90	0,05	0,25	0,5	N/A	N/A	Multimode
0850L-11A	150	0,03	0,25	0,1	1000:1	1,3	TEM00
0850L-13A	100	0,03	0,25	0,1	N/A	1,05	TEM00
0850L-14A	130	0,03	0,25	0,1	N/A	N/A	Multimode
0850L-15A	100	0,03	0,25	0,1	27 dB	1,05	TEM00
0850L-16A	130	0,03	0,25	0,1	N/A	N/A	Multimode
0915L-11A	170	0,05	0,25	0,5	2000:1	1,2	TEM00
0915L-13A	80	0,05	0,25	0,5	N/A	1,05	TEM00
0915L-14A	140	0,05	0,25	0,5	N/A	N/A	Multimode
0915L-15A	80	0,05	0,25	0,5	27 dB	1,05	TEM00
0915L-16A	140	0,05	0,25	0,5	N/A	N/A	Multimode
0975L-11A	170	0,05	0,25	0,5	2000:1	1,2	TEM00
0975L-13A	100	0,05	0,25	0,5	N/A	1,05	TEM00
0975L-14A	140	0,05	0,25	0,5	N/A	N/A	Multimode
0975L-15A	100	0,05	0,25	0,5	27 dB	1,05	TEM00
0975L-16A	140	0,05	0,25	0,5	N/A	N/A	Multimode
1030L-11B	500	0,1	1,5	0,7	1000:1	1,05	TEM00
1030L-13B	350	0,1	1,5	0,7	N/A	1,05	TEM00
1030L-14B	400	0,1	1,5	0,7	N/A	N/A	Multimode
1030L-15B	350	0,1	1,5	0,7	27 dB	1,05	TEM00
1030L-16B	400	0,1	1,5	0,7	N/A	N/A	Multimode
1064L-11B	500	0,1	1,5	0,1	1500:1	1,1	TEM00
1064L-13B	300	0,1	1,5	0,1	N/A	1,05	TEM00
1064L-14B	400	0,1	1,5	0,1	N/A	N/A	Multimode
1064L-15B	300	0,1	1,5	0,1	27dB	1,05	TEM00
1064L-16B	400	0,1	1,5	0,1	N/A	N/A	Multimode
1123L-11B	200	0,2	3	0,7	1000:1	1,1	TEM00
1123L-13B	100	0,5	3	0,7	N/A	1,05	TEM00
1123L-14B	160	0,5	3	0,7	N/A	N/A	Multimode
1123L-15B	100	0,5	3	0,7	23 dB	1,05	TEM00
1123L-16B	160	0,5	3	0,7	N/A	N/A	Multimode
1319L-11B	200	0,2	3	0,7	1000:1	1,1	TEM00
1319L-13B	100	0,5	3	0,7	N/A	1,05	TEM00
1319L-14B	160	0,5	3	0,7	N/A	N/A	Multimode
1319L-15B	100	0,5	3	0,7	23 dB	1,05	TEM00
1319L-16B	160	0,5	3	0,7	N/A	N/A	Multimode
	200	0,2	3	0,7	1000:1	1,1	TEM00
1342L-13B	100	0,5	3	0,7	N/A	1,05	TEM00
1342L-14B	160	0,5	3	0,7	N/A	N/A	Multimode
1342L-15B	100	0,5	3	0,7	23 dB	1,05	TEM00
1342L-16B	160	0,5	3	0,7	N/A	N/A	Multimode
1550L-11A	120	0,2	0,25	8	1500:1	1,2	TEM00
1550L-13A	60	0,05	0,25	8	N/A	1,05	TEM00
1550L-14A	200	0,2	0,25	10	N/A	N/A	Multimode
1550L-15A	60	0,05	0,25	8	27 dB	1,05	TEM00
1550L-16A	200	0,2	0,25	10	N/A	N/A	Multimode

* Typical performance (full specification available at <https://integratedoptics.com/products/cw-lasers>)

Custom: other wavelengths and configurations are available on request.

Note: Product specifications are subject to change without prior notice to improve reliability, function or design or otherwise.

High Power (Class 4) Lasers

Platform	Output power, mW	Power Stability, % RMS, 8 hrs*	Noise, % RMS, 20 Hz to 20 MHz*	Spectral Line-width FWHM, nm*	Polarization contrast*	Fiber core diameter, μm
0405L-31A	500	0,2	0,8	1	100	N/A
0405L-34A	400	1	0,8	1	N/A	50
0405L-36A	400	1	0,8	1	N/A	50
0450L-31A	400	0,1	0,8	0,7	N/A	N/A
0450L-34A	300	0,1	0,3	0,7	N/A	50
0450L-36A	300	0,1	0,3	0,7	N/A	50
0532L-31B	500	0,2	3	0,3	2000	N/A
0532L-34B	400	1	3	0,3	N/A	50
0532L-36B	400	1	3	0,3	N/A	50
0638L-31A	600	0,2	0,4	1	N/A	N/A
0638L-34A	500	1	0,4	1	N/A	50
0638L-36A	500	1	0,4	1	N/A	50
0785L-31A	1500	0,2	0,4	1	N/A	N/A
0785L-34A	1000	1	0,4	1	N/A	50
0785L-36A	1000	1	0,4	1	N/A	50
0808L-31A	3000	1	0,25	1	N/A	N/A
0808L-34A	1600	1	0,25	1	N/A	50
0808L-36A	1600	1	0,4	1	N/A	50
0830L-34A	1000	1	0,25	1	N/A	50
0830L-36A	1000	1	0,25	1	N/A	50
0915L-34A	2000	1	0,25	1	N/A	50
0915L-36A	2000	1	0,25	1	N/A	50
0940L-34A	2000	1	0,25	1	N/A	50
0940L-36A	2000	1	0,25	1	N/A	50
0975L-34A	2000	1	0,25	1	N/A	50
0975L-36A	2000	1	0,25	1,5	N/A	50
1064L-34A	1000	1	0,25	1,5	N/A	50
1064L-36A	1000	1	0,25	1,5	N/A	50
1550L-34A	1000	1	0,25	2	N/A	50
1550L-36A	1000	1	0,25	2	N/A	50

* Typical performance (full specification available at <https://integratedoptics.com/products/cw-lasers>)

Note: Product specifications are subject to change without prior notice to improve reliability, function or design or otherwise.

Other parameters of CW lasers

Beam properties:

- Beam diameter at aperture ($1/e^2$): <2 mm for diode and ~1 mm for DPSS
- Beam divergence (full angle): <1.5 mrad for diode and DPSS, except 500 mW versions of 532 nm and 785 nm
- Beam pointing stability: <5 μ rad/C°

Modulation:

- Fast TTL modulation (up to 10 MHz in ACC mode) is available for non-SLM diode lasers
- Typical rise time of diode non-SLM lasers is 17ns
- Typical fall time of diode non-SLM lasers is 13 ns
- Modulation of DPSS lasers (up to few kHz) is implemented upon request
- For SLM diode and all DPSS lasers, the TTL pin is configured for fan speed control

Fiber specs:

- Default connector for SLM laser is FC/APC.
- Default connector for regular spectrum lasers is FC/PC
- Standard length of a fiber is 1 m to 1.2 m
- Polarization rotation (PM fiber): less than 5 degree

Physical properties:

- Control interface type: UART serial bus, convertible to USB or RS232 using standard accessories
- External power supply requirement: +5VDC, 5A for DPSS, 1.5 A for diode up to 200 mW
- Dimensions (L-W-H): 50 x 30 x 18 mm (excluding pins and output window)
- Beam height from the base: 10.4 mm (+/- 0.3 mm)
- Heatsink requirement: diode <1 °C/W, DPSS <0.5 °C/W
- Optimum heatsink temperature (non-condensing): +15...+30 °C
- Max. heatsink temperature 40 °C
- Internal temperature stabilization: TEC
- Overheat protection: Yes
- Storage temperature (non-condensing): -10 to +50 °C
- Warranty: 14 months, or 10000 hours, whichever occurs first. Operational time calculation is based on an internal EPROM counter

Compatibility:

- RoHS
- General Product Safety Directive (GPSD) 2001/95/EC
- Electromagnetic Compatibility (EMC) Directive 2004/108/EC
- IEC60825-1:2014 (compliant only using additional accessories)

Unified Physical Control Interface



Vcc and GND pins are for +5 VDC power supply;
Tx and Rx pins are for UART communication;
TTL pin is used for digital modulation;
For DPSS and VBG diode lasers, the TTL pin
is configured for FAN control of a compatible heatsink.



MatchBox Accessories

BREAK-OUT-BOX

An optional accessory which simplifies installation and use of MatchBox lasers. It provides DATA, POWER connections as well as interlock, TTL modulation and fan control pins.

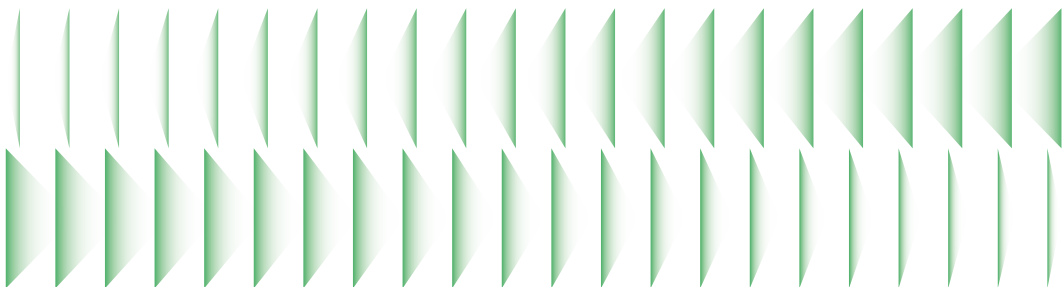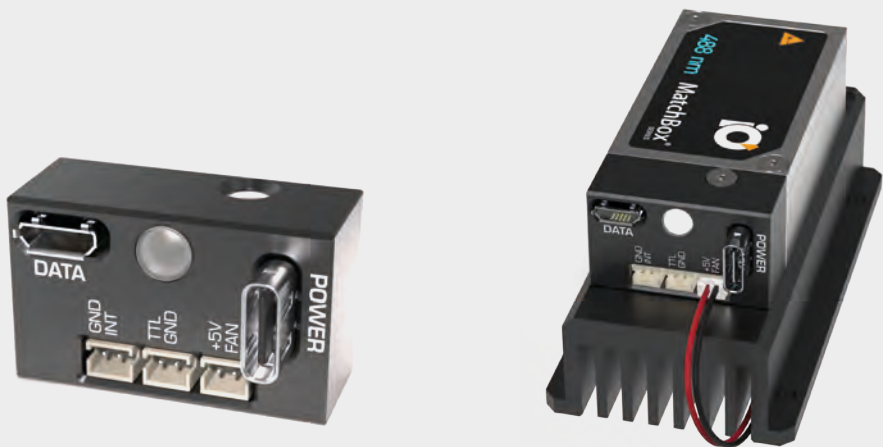

HEATSINKS

We offer a range of heatsinks - from cost effective sinks with fan cooling to high- end TEC coolers.

SHUTTERS

several shutter options are provided with extra functionality of lens holder (for beam expanders), optical isolator holders, cage bench adapters.

POWER SUPPLIES

our break-out-boxes are now standartized for PD (Power Delivery standard), thus we are offering several models of PD power supplies.

