

Unibody-Design Femtosecond Lasers for Industry and Science



Tunable pulse duration,
190 fs – 20 ps

Maximum output of
120 W, 1 mJ or 80 W, 2 mJ

Single-shot – 2 MHz
repetition rate

Pulse-on-demand and
BiBurst for pulse control


Up to 5th harmonic or
tunable extensions

Air-cooled model


Compact industrial-grade design

CARBIDE-CB3


CARBIDE-CB3
Typical pulse duration

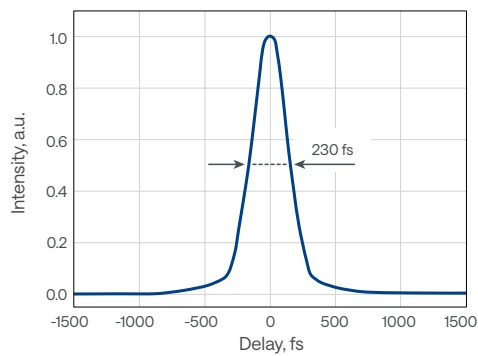


CARBIDE-CB3
Typical pulse spectrum

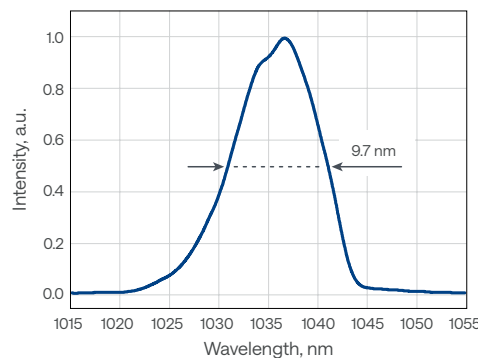

CARBIDE-CB3
Typical beam profile

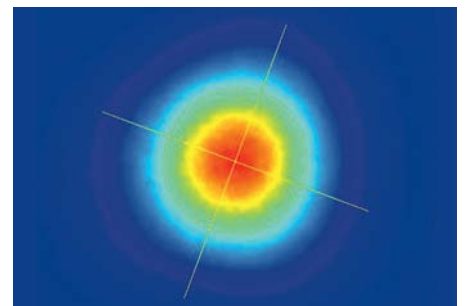

CARBIDE-CB3-120W
Long-term power stability

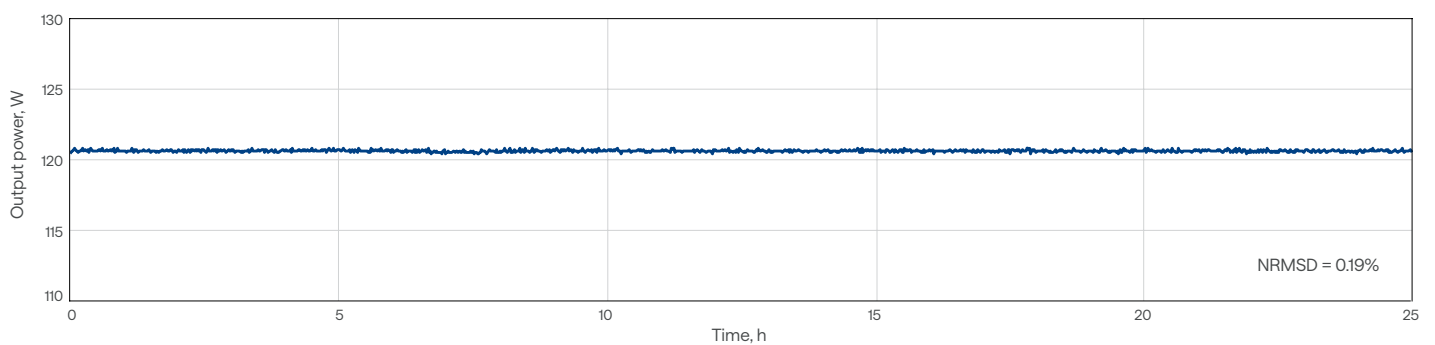

CARBIDE-CB3 specifications

NEW

Model	CB3-20W	CB3-40W	CB3-80W	CB3-120W
-------	---------	---------	---------	----------

OUTPUT CHARACTERISTICS

Cooling method	Water-cooled			
Center wavelength ¹⁾	1030 ± 10 nm			
Maximum output power	20 W	40 W	80 W	120 W
Pulse duration ²⁾	< 250 fs		< 350 fs ³⁾	< 250 fs
Pulse duration tuning range	250 fs – 10 ps		350 fs – 10 ps	250 fs – 10 ps
Maximum pulse energy	0.4 mJ		0.8 mJ	2 mJ
Repetition rate	Single-shot – 1 MHz	Single-shot – 1 MHz (2 MHz on request)	Single-shot – 2 MHz	
Pulse selection	Single-shot, pulse-on-demand, any fundamental repetition rate division			
Polarization	Linear, vertical; 1: 1000			
Beam quality, M ²	< 1.2			
Beam diameter ⁴⁾	3.9 ± 0.4 mm	4.2 ± 0.4 mm	5.1 ± 0.7 mm	5 ± 0.5 mm
Beam pointing stability	< 20 µrad/°C			
Pulse picker	FEC ⁵⁾			
Pulse picker leakage	< 0.25%			
Pulse-to-pulse energy stability, 24 h ⁶⁾	< 0.5%			
Long-term power stability, 100 h ⁶⁾	< 0.5%			

MAIN OPTIONS

Oscillator output ⁷⁾	< 0.5 W, 120 – 250 fs, 1030 ± 10 nm, ≈ 65 MHz			
Harmonic generator ⁸⁾	515 nm, 343 nm, 257 nm, or 206 nm			
Optical parametric amplifier ⁹⁾	320 – 10000 nm			n/a
BiBurst option	Tunable GHz and MHz burst with burst-in-burst capability			

PHYSICAL DIMENSIONS

Laser head (L × W × H)	632 × 305 × 174 mm			
Chiller (L × W × H)	585 × 484 × 221 mm	680 × 484 × 307 mm		
24 V DC power supply (L × W × H) ¹⁰⁾	280 × 144 × 49 mm	320 × 200 × 75 mm	376 × 449 × 88 mm	

ENVIRONMENTAL AND UTILITY REQUIREMENTS

Operating temperature	15 – 30 °C			
Relative humidity	< 80% (non-condensing)			
Electrical requirements	Laser	100 V AC, 7 A – 240 V AC, 3A; 50 – 60 Hz	100 V AC, 12 A – 240 V AC, 5 A; 50 – 60 Hz	180 – 240 V AC, 16 A max; 50 – 60 Hz
	Chiller	100 – 230 V AC; 50 – 60 Hz		
Rated power	Laser	600 W	1000 W	2000 W
	Chiller	1400 W	2000 W	
Power consumption	Laser	500 W	900 W	1400 W
	Chiller	1000 W	1300 W	1700 W

¹⁾ Precise center wavelength for specific models available upon request.

²⁾ Assuming Gaussian pulse shape.

³⁾ Pulse duration can be reduced to < 250 fs if pulse peak intensity of > 50 GW/cm² is tolerated by the customer setup.

⁴⁾ FW 1/e², using maximum pulse energy.

⁵⁾ Provides fast energy control; external analog control input available. Response time – next available RA pulse.


⁶⁾ Under stable environmental conditions. Expressed as NRMSD (normalized root mean squared deviation).

⁷⁾ Available simultaneously, requires scientific interface. Contact sales@lightcon.com for details or customized solutions.

⁸⁾ Integrated. For external harmonic generator, refer to HIRO.

⁹⁾ Integrated. For more options and OPAs, refer to www.lightcon.com.

¹⁰⁾ Power supply can be different if optional 2 MHz version is selected.



CARBIDE-CB5 (air-cooled) specifications

Model	CB5		CB5-SP
OUTPUT CHARACTERISTICS			
Cooling method	Air-cooled ¹⁾		
Center wavelength ²⁾	1030 ± 10 nm		
Maximum output power	6 W	5 W	
Pulse duration ³⁾	< 290 fs		< 190 fs
Pulse duration tuning range	290 fs – 20 ps		190 fs – 20 ps
Maximum pulse energy	100 µJ	83 µJ	100 µJ
Repetition rate	Single-shot – 1 MHz		
Pulse selection	Single-shot, pulse-on-demand, any fundamental repetition rate division		
Polarization	Linear, vertical; 1: 1000		
Beam quality, M ²	< 1.2		
Beam diameter ⁴⁾	2.1 ± 0.4 mm		
Beam pointing stability	< 20 µrad/°C		
Pulse picker	Included	Included ⁵⁾	Included
Pulse picker leakage	< 2 %	< 0.1%	< 2 %
Pulse-to-pulse energy stability, 24 h ⁶⁾	< 0.5%		
Long-term power stability, 100 h ⁶⁾	< 0.5%		

MAIN OPTIONS

Oscillator output	n/a		
Harmonic generator ⁷⁾	515 nm, 343 nm, 257 nm, or 206 nm		
Optical parametric amplifier ⁸⁾	320 – 10000 nm		
BiBurst option	n/a		

PHYSICAL DIMENSIONS

Laser head (L × W × H)	631 × 324 × 162 mm		
Chiller	Not required		
24 V DC power supply (L × W × H)	220 × 95 × 46 mm		

ENVIRONMENTAL AND UTILITY REQUIREMENTS

Operating temperature	17 – 27 °C		
Relative humidity	< 80% (non-condensing)		
Electrical requirements	100 V AC, 3 A – 240 V AC, 1.3 A; 50 – 60 Hz		
Rated power	300 W		
Power consumption	150 W		

¹⁾ Water-cooled version available on request.

²⁾ Precise center wavelength for specific models available upon request.

³⁾ Assuming Gaussian pulse shape.


⁴⁾ FW 1/e², using maximum pulse energy.

⁵⁾ Enhanced contrast AOM. Provides fast amplitude control of output pulse train.


⁶⁾ Under stable environmental conditions. Expressed as NRMSD (normalized root mean squared deviation).

⁷⁾ Integrated. For external harmonic generator, refer to HIRO.


⁸⁾ Integrated. For stand-alone OPAs, refer to www.lightcon.com.




CARBIDE-CB5-SP
Typical pulse duration

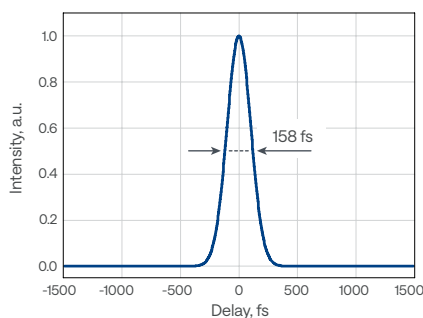

CARBIDE-CB5
Long-term power stability

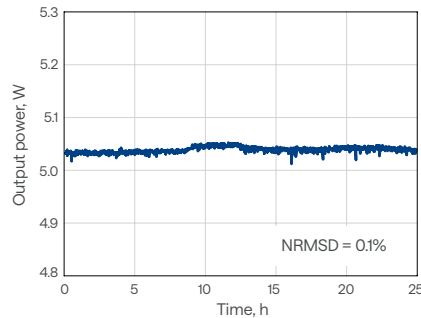


CARBIDE-CB5
Typical beam profile

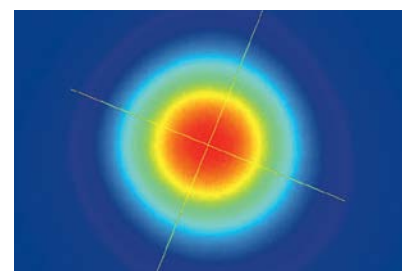


Stability measurements

CARBIDE-CB3 output power and beam direction stability with power lock enabled, across varying environmental conditions

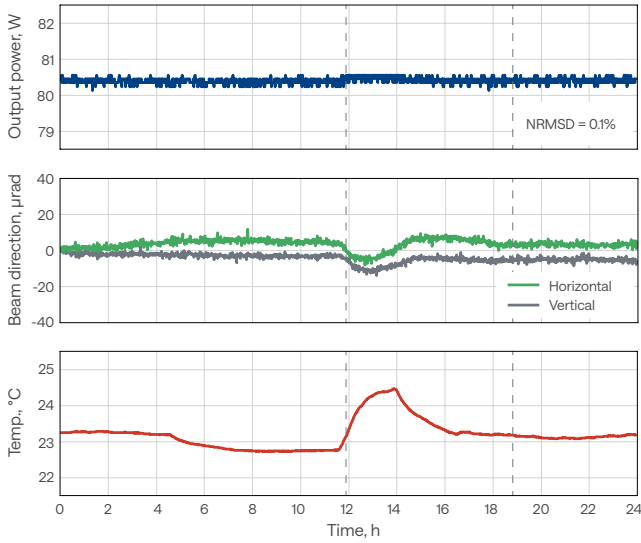


CARBIDE-CB3

Typical pulse-to-pulse energy stability

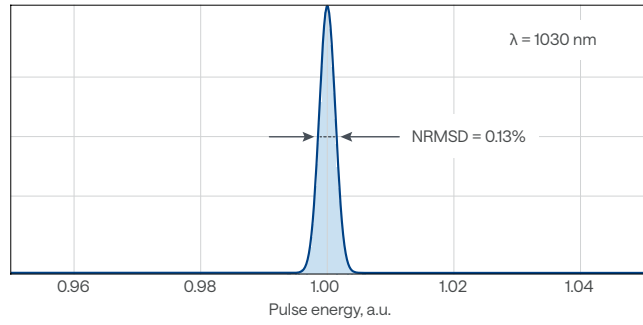

Drawings

CARBIDE-CB3 drawing

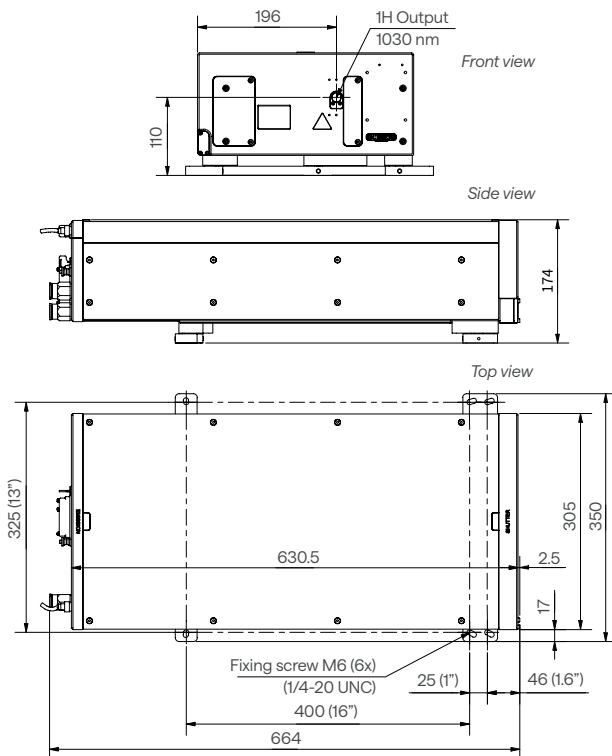

Air-cooled CARBIDE-CB5 with attenuator drawing

